

► TWF – Shoring extractor

■ Shoring extractor VZ 100

TWF shoring extractor – safe and efficient extraction of slide rail panels and corner/double slide rails

■ How it works:

- Attach the shoring extractor via quick coupling system (OilQuick/Likufix).
- Depending on the installation situation, put the necessary support in place (HEB, shoring prop).
- Attach shoring extractor to the shoring element that is to be extracted.
- Pull up the shoring element.

■ Tensile force: up to 100 tonnes


■ Benefits:

- No large excavator required to extract the shoring elements.
- Fast extraction.
- Safe handling.
- Less wear and tear.
- No uncontrolled hazardous situations.

■ Compatibility:

- Can be used with **Oilquick** and **Likufix** quick coupling systems.

■ Area of use: Particularly effective with large slide rail panels up to 7 metres long.

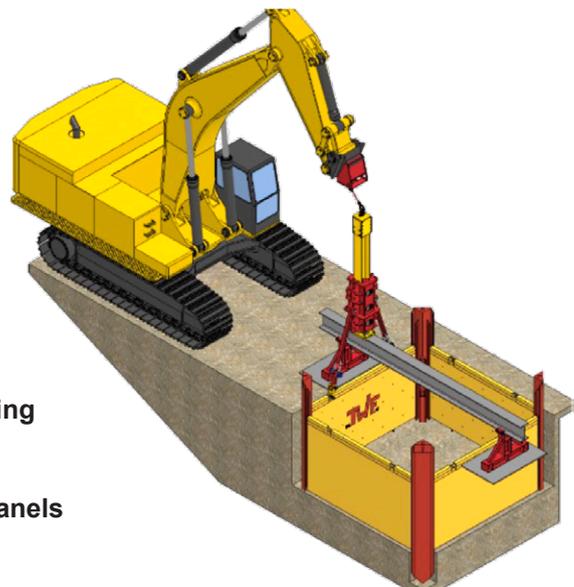

01-2026